

Dual Input Omnidirectional Antenna



The MVDP4.4-5.0-7-DAB antenna is designed to be used in military, commercial, and other vehicular applications where reliability is needed most. This antenna works with all radios within the 4400-5000 MHz band.

The antenna is provided with state-of-the-art radiating elements essential for maximum reliability and superior performance. Typical Port-to-Port Isolation ranges from 40 ~ 50 dB.

Being “ground independent”, this antenna can be used on all types of vehicles (metal or non-metal) with no degradation in performance.

Robust and tough, this antenna is housed in a thick fiberglass radome and is constructed from corrosion resistant materials for reliability in the harshest environments.






Dual Input Omnidirectional Antenna Specifications

ELECTRICAL:

Frequency Range:	4400-5000 MHz
Gain:	7.0 dBi +/- .5
VSWR:	2.0:1 Maximum
Input Impedance:	50 Ω Nominal
Power:	25 Watts
Polarization:	Vertical over Vertical
Port-to-Port Isolation:	40 ~ 50 dB Typical
Radiation Pattern:	Azimuth: 360° Elevation: 20°
DC Short:	Yes
Input Connector:	(2) Type N Female

MECHANICAL:

Overall Height:	40 in. (1.02 m)
Radome Diameter:	1.5 in. (38.1 mm)
Net Weight:	4 lb. (1.81 kg)
Operational Temps:	-40° to +185°F (-40° to +85°C)
Color:	Black/Green/Tan/Grey
Mounting:	NATO Standard Four .5" (12.7 mm) Holes, equally spaced on a 4.5" (114.3 mm) Dia. BHC

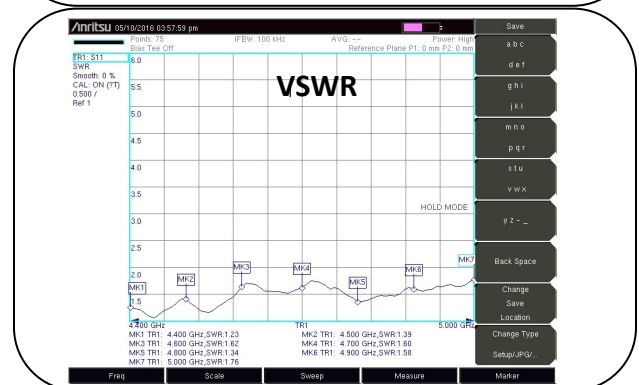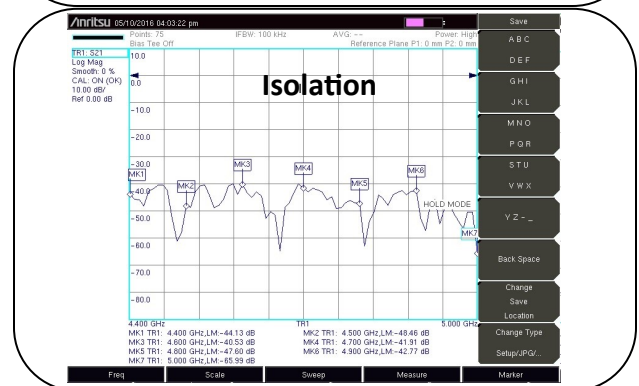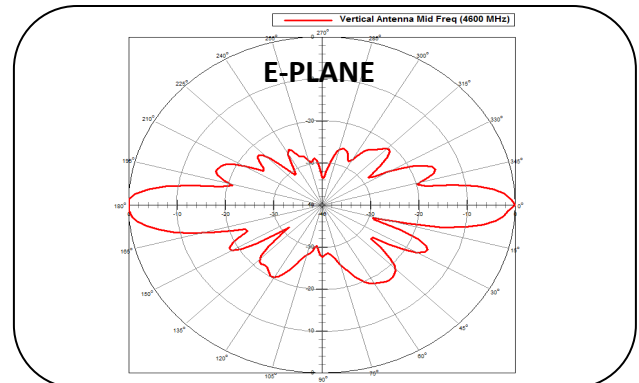

**All information on this product and the product itself is the property of and is proprietary to Hascall-Denke.

**Specifications are subject to change without prior notice.



Made in the USA
ISO 9001:2008 Certified
(1Y19400)

P.O. Box 909, Palmetto, Florida 34220-0909
Tel: 941-723-2833 • Fax: 941-723-1628
www.hascall-denke.com