


Omnidirectional Antenna

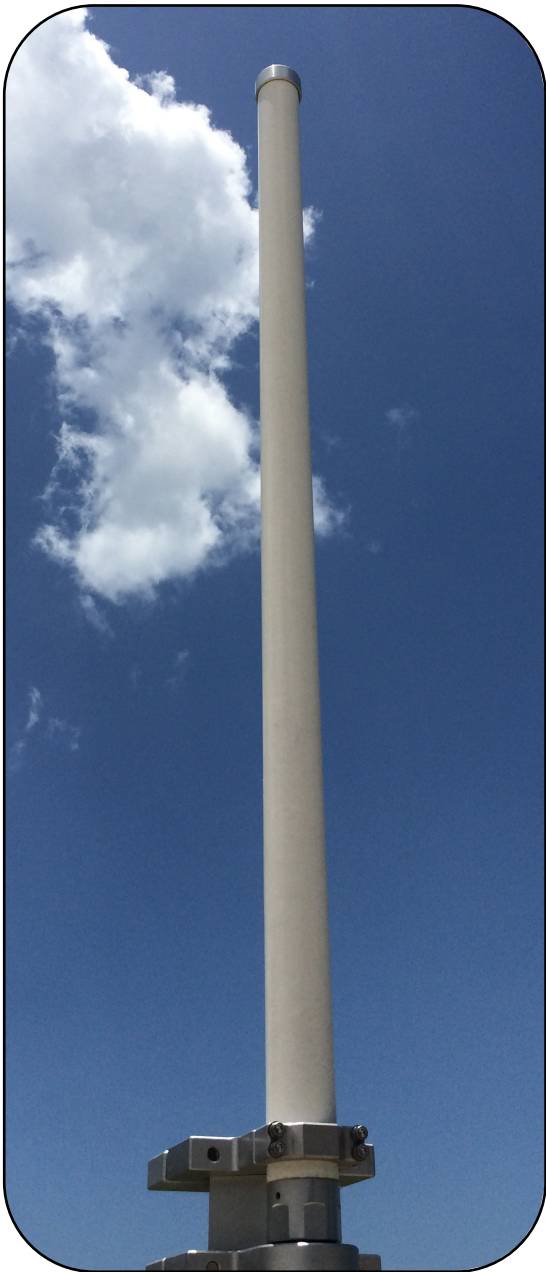

The FXCL460-480 antenna is designed to be used in public safety, commercial, military and other applications where reliability is needed most. This antenna works with all radios within the 460-480 MHz band.

Being “ground independent”, this antenna can be used on all types of structures (metal or non-metal) with no degradation in performance.

The antenna is provided with state-of-the-art radiating elements essential for maximum reliability and superior performance.

Robust and tough, this antenna is housed in a thick fiberglass radome double reinforced at the base and is constructed from corrosion resistant materials for reliability in the harshest environments.



Omnidirectional Antenna



Specifications

ELECTRICAL:

Frequency Range:	460-480 MHz
Gain:	5 dBi
VSWR:	< 1.5:1 Typical
Input Impedance:	50 Ω Nominal
Power:	150 Watts
Polarization:	Vertical
Radiation Pattern:	Azimuth: 360° Elevation: 16°
Input Connector:	Type N Female

MECHANICAL:

Overall Height:	44 in. (1.12 m)
Radome Diameter:	2 in. (50.8 mm)
Maximum Wind Load:	150 mph (241 km/h)
Net Weight:	2.5 lb. (1.2 kg) Max
Operational Temps:	-40° to +185°F (-40° to +85°C)
Color:	White
Mounts:	HDM001

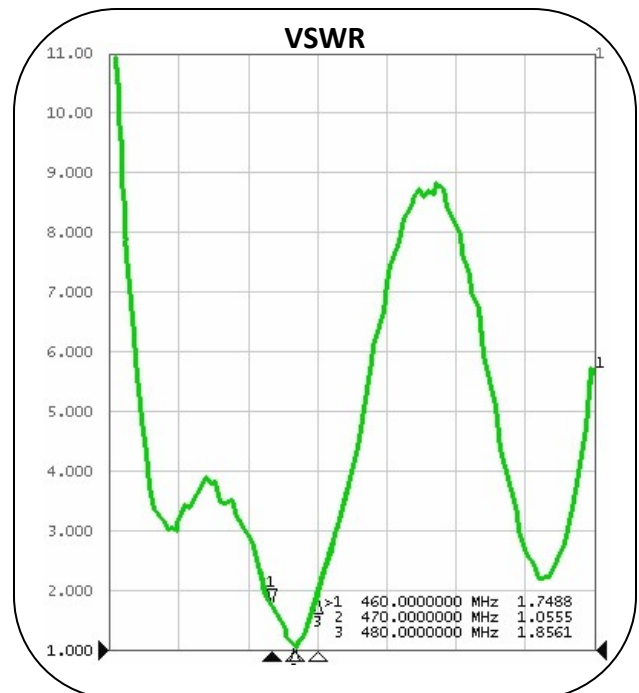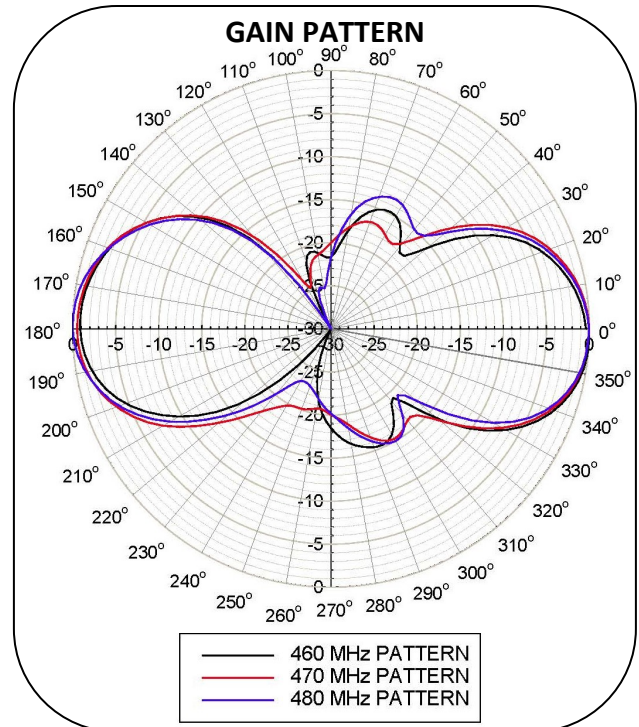

**All information on this product and the product itself is the property of and is proprietary to Hascall-Denke.

**Specifications are subject to change without prior notice.



Made in the USA
ISO 9001:2008 Certified
(1Y30300)

P.O. Box 909, Palmetto, Florida 34220-0909
Tel: 941-723-2833 • Fax: 941-723-1628
www.hascall-denke.com