

The AVDP700X4 is designed to work with all radios operating from 700-2700 MHz.



Features

- Ground Plane Independent
- Durable Construction

Electrical Specifications

Frequency	700-2700 MHz
Polarization	Vertical
Impedance	50 Ω Nominal
VSWR	≤ 2.5:1 Typical
Gain	2.0 dBi +/- .5
Radiation Pattern	Azimuth 360° Elevation 53°
Power	20 Watts
Connector	Side Mount SMA-F

Mechanical Specifications


Design	Dipole
Weight	0.6 lbs
Height	7 in
Radome	2.25 in dia
Mounting	1/4"-20 Threaded Insert (blind)
Color	Black

**All information on this product and the product itself is the property of and is proprietary to Hascall-Denke.


**Specifications are subject to change without prior notice.



Pattern

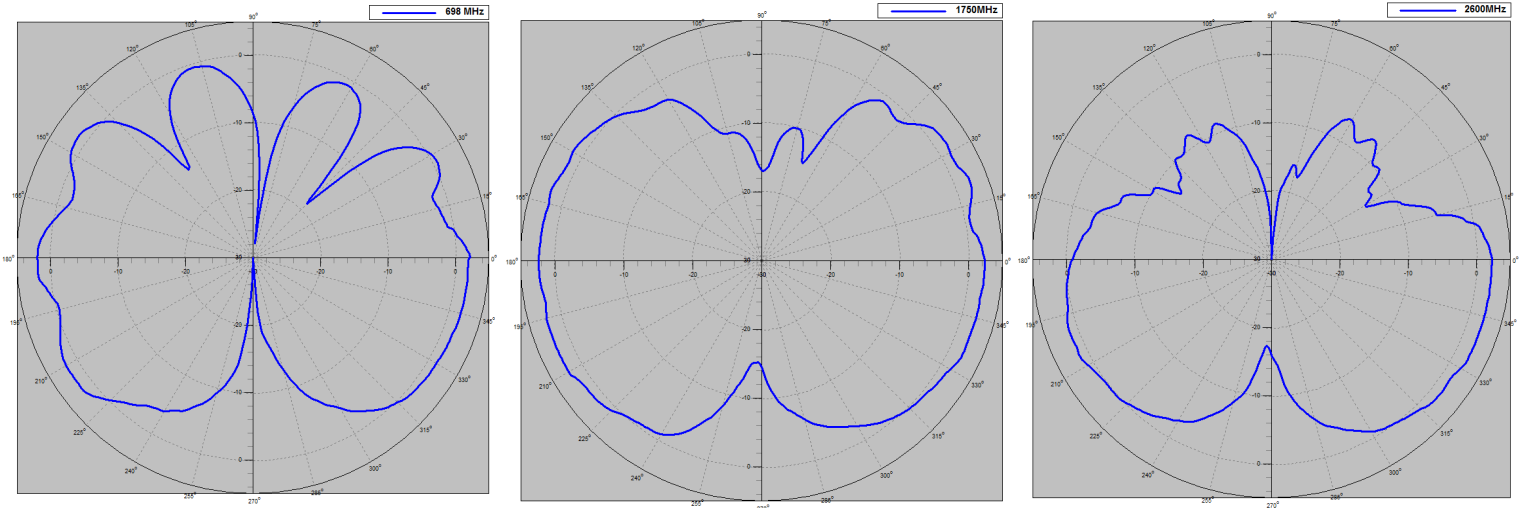

VSWR

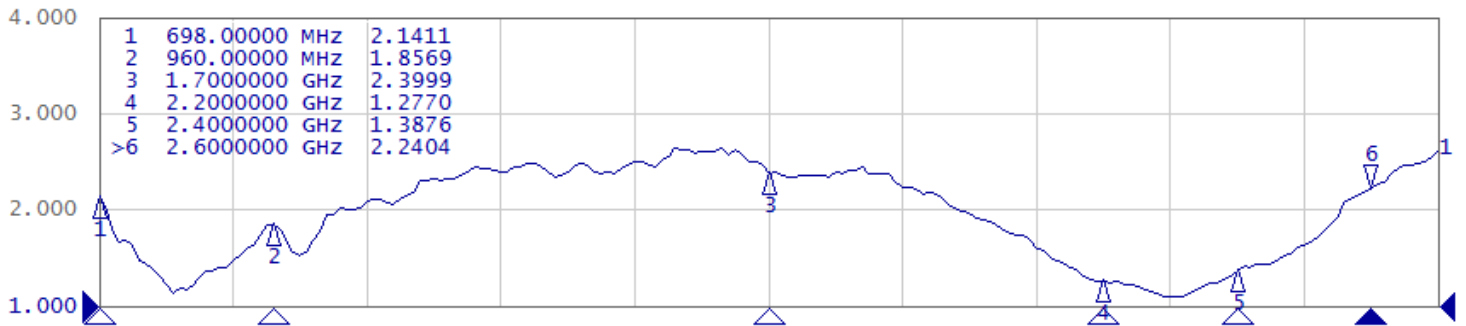

Gain vs. Frequency

