


Omnidirectional Vehicular Antenna

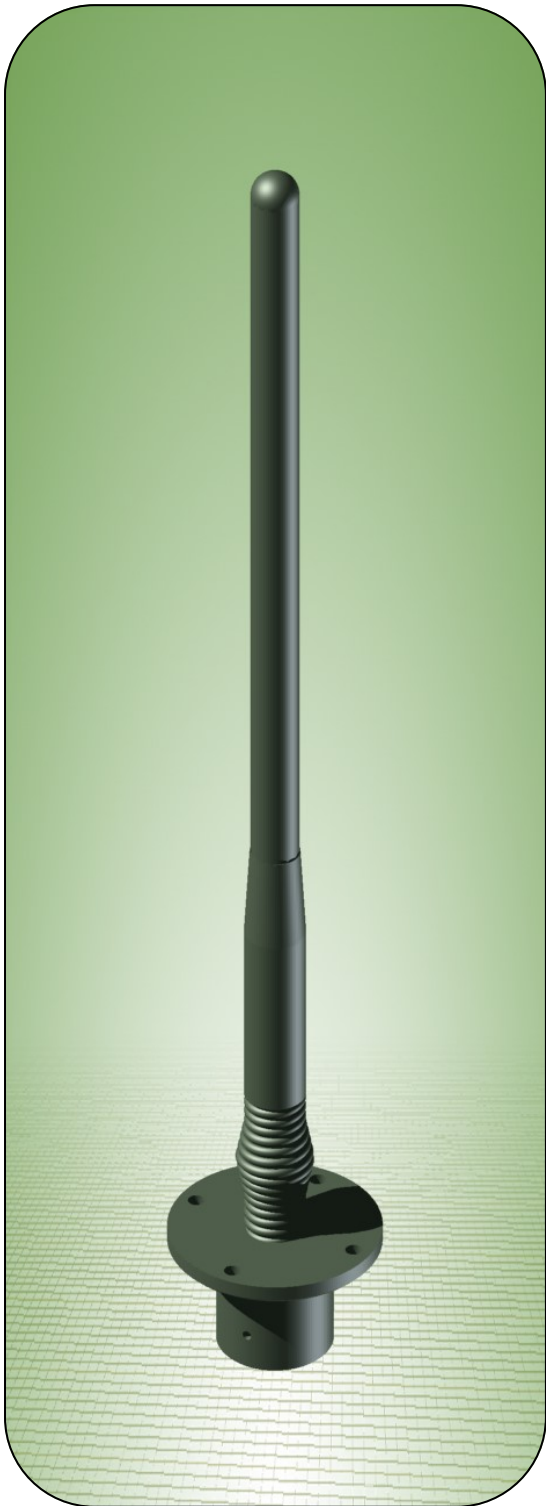

The MVDP700-960-5 antenna is designed to be used in military, commercial, and other vehicular applications where reliability is needed most. This antenna works with all radios within the 700-960 MHz band.

Being “ground independent”, this antenna can be used on all types of vehicles (metal or non-metal) with no degradation in performance.

The antenna is provided with state-of-the-art radiating elements essential for maximum reliability and superior performance.

Robust and tough, this antenna is housed in a thick fiberglass radome double reinforced at the base and is constructed from corrosion resistant materials for reliability in the harshest environments.

- **User Friendly and Easy to Install**
- **360° Azimuth Coverage**
- **Ideal Pattern/Beam Width and Sidelobe Control**
- **Radiator Located at Top of Antenna for Maximum Emission Performance**
- **Plug & Play Design**



Omnidirectional Vehicular Antenna

Specifications


ELECTRICAL:

Frequency Range:	700-960 MHz
Gain:	5.0 dBi +/- .5
VSWR:	< 2.0:1 Typical
Input Impedance:	50 Ω Nominal
Power:	40 Watts
Polarization:	Vertical
Radiation Pattern:	Azimuth: 360° Elevation: 67°
Input Connector:	Type N Female


MECHANICAL:

Overall Height:	30 in. (0.76 m)
Radome:	1.50 in. OD (38.1 mm)
Net Weight:	5.3 lb. (2.4 kg)
Operational Temps:	-40° to +158°F (-40° to +70°C)
Color:	Black/Green/Tan/Grey
Mounting:	NATO Standard Four .5" (12.7 mm) Holes, equally spaced on a 4.5" (114.3 mm) Dia. BHC
Compliance:	Built to meet: MIL-STD-810F

3D REFERENCE

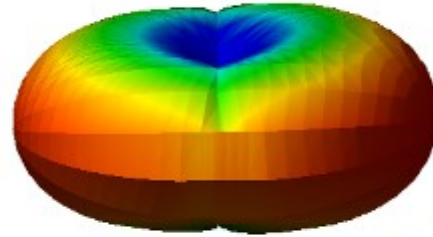

ELEVATION PATTERN REFERENCE

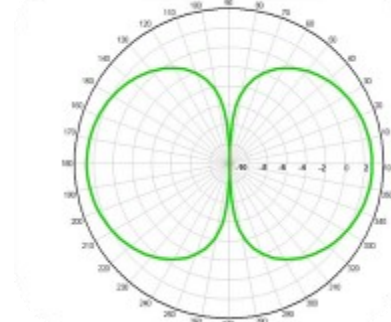

VSWR



**All information on this product and the product itself is the property of and is proprietary to Hascall-Denke.

**Specifications are subject to change without prior notice.



Made in the USA
ISO 9001:2015 Certified
(1Y30800)

P.O. Box 909, Palmetto, Florida 34220-0909
Tel: 941-723-2833 • Fax: 941-723-1628
www.hascall-denke.com