

The FXDP150/450/816 is a full spectrum multiband VHF, UHF-H, 700/800/900MHz antenna designed for today's latest Land Mobile Radios (LMR) for maritime, military, commercial, public safety and law enforcement applications

The radiator elements are designed for maximum durability and performance. The antenna radiator is sealed in heavy duty fiberglass for mechanical stability and reliability in harsh environments.

Being ground independent, this antenna can be mounted on various platforms (metal or non-metal) with no degradation of performance.

Features


- Ground independent
- Single Input
- Built to MIL-STD-810

Electrical Specifications

Frequency	136-174MHz 380-520MHz 762-870MHz
Polarization	Vertical
Impedance	50Ω Nominal
VSWR	≤2.0:1 Typical <3.0:1 Max band edges
Gain	+2 to +3dBi ±.5
Pattern	Omni Directional
Power	100 Watts
Connector	55" pigtail w/Type N Female

Mechanical Specifications

Design	Dipole
Height	41.25in. (1.05m)
Diameter	2¼" (57.15mm)
Radome	Fiberglass
Weight	5.5lbs. (2.5kg.)
Wind load	150MPH Max (241kph)
Operating Temperature	-40° to 85°C
Mounting	1" 14 Thread Extension sold separately
Color	White/Black/Green/Tan/Grey

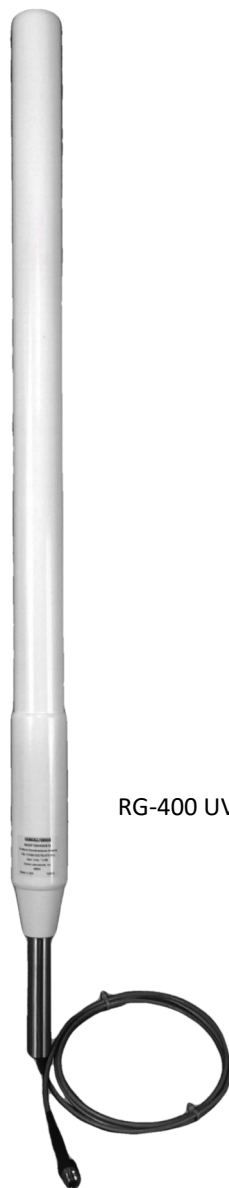

RG-400 UV Protected Pigtail

Shown with optional 1"-14 Thread Extension

****All information on this product and the product itself is the property of and is proprietary to Hascall-Denke.**

****Specifications are subject to change without prior notice.**







FXDP150/450/816

136-174/380-520/762-870MHz

Tri-Band Antenna

NSN: 5985-01-674-4618

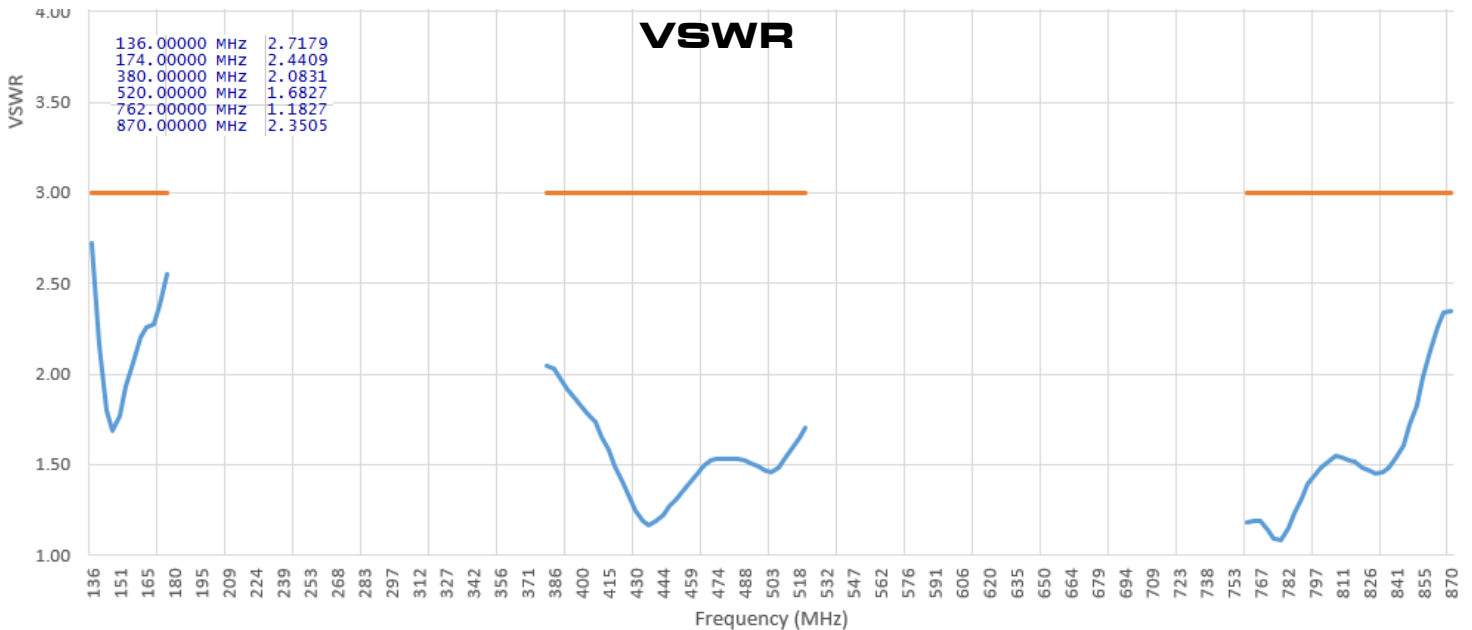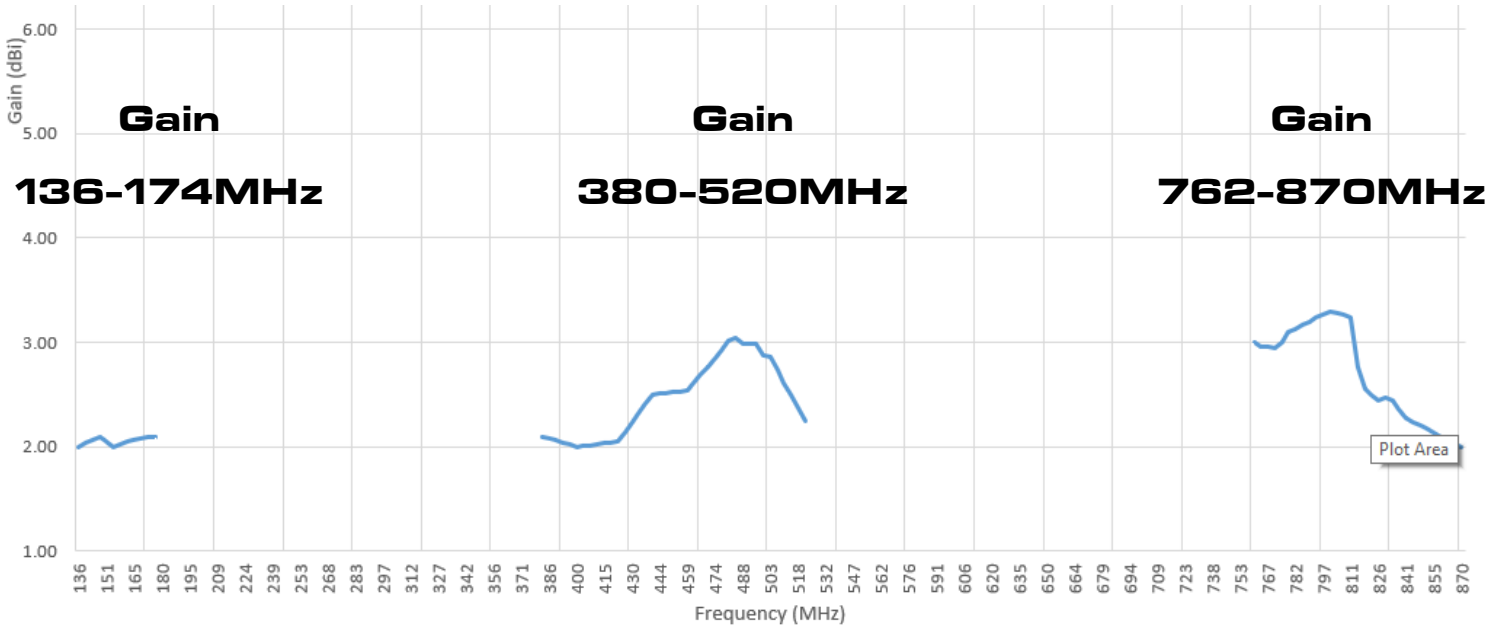

Made in the USA
ISO 9001 Certified
Form F042, Rev: A

www.hascall-denke.com
12285 U.S. Highway 41 N., Palmetto, FL 34221
1-800-473-2139

1Y33200

